




7. Vid händelse av att vatten tränger in

Luta fordonet åt ena sidan så att vattnet rinna ut ur fordonet och högspänningsbatteriet.

Använd lämplig personlig skyddsutrustning. Avlägsna fordonet från vattnet och fortsätt med normal högspänningsfrånkoppling (se kapitel 3). Fordon som kört ner i saltvatten ska hanteras varsamt då risken för brand i högspänningsbatteriet är högre.

8. Bogsering/transport/förvaring


FÖRVARA PÅ SÄKERT AVSTÅND FRÅN ANDRA FORDON!

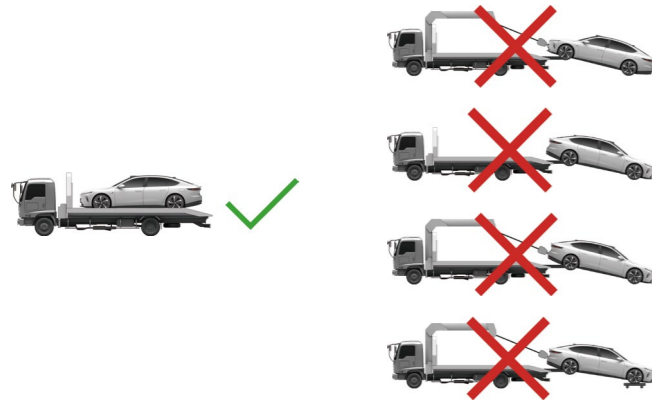

Metod för bogsering/transport



NYTÄNDNING AV BATTERI!!



Krokförvaring



Krokplats


9. Viktig extrainformation

Tillverkarinformation NIO


För ytterligare detaljer, se "Guide för nödsituationer".





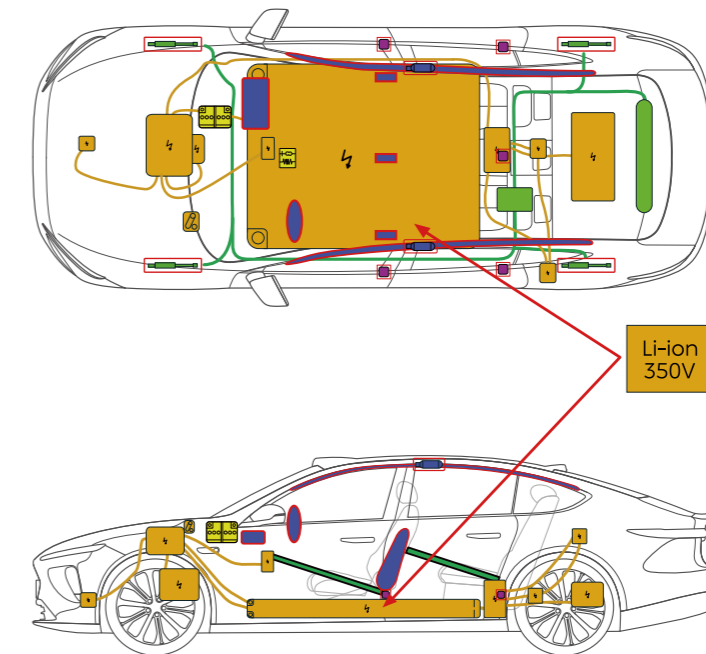




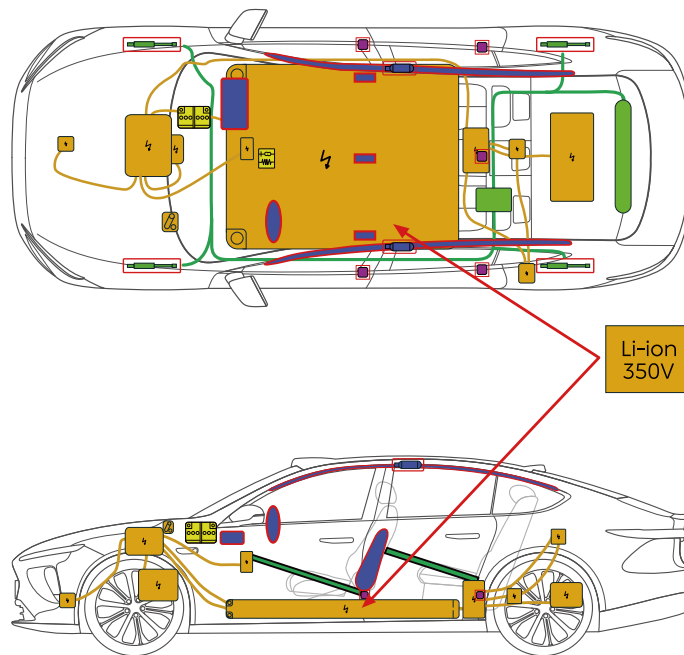










10. Förklaring av piktogram som används

	Varning för högspänning		Lättantändlig
	Försiktighet		Farligt för mänsklig hälsa
	Luftkonditioneringskomponent		Akut toxicitet
	Elfordon		Frätande ämnen
	Huv		Gaser under tryck
	Baklucka		Explosivt ämne
	Använd termisk infraröd kamera		Använd vatten för att släcka branden



	Krockkudde		Pump med lagrad gas		Förspännare till säkerhetsbälte		SRS-kontrollenhet		Aktivt skyddssystem för fotgängare
	Automatiskt vältningsskyddssystem		Gasfjäderben /Förspänd fjäder		Zon med hög styrka		Zon som kräver särskild uppmärksamhet		
	Låg spänning i batteri		Ultrakondensator, låg spänning		Bränsletank		Gastank		Säkerhetsventil
	Högspänningsbatteripaket		Högspänningsströmkabel /-komponent		Frånkoppling av högspänning				
	Inaktivering av säkringsbox högspänningssystem		Ultrakondensator, hög spänning		Gasledning				



	Airbag		Stored gas inflator		Seat belt pretensioner		SRS control unit		Pedestrian protection active system
	Automatic rollover protection system		Gas strut /Preloaded spring		High strength zone		Zone requiring special attention		
	Battery low voltage		Ultra capacitor, low voltage		Fuel tank		Gas tank		Safety valve
	High voltage battery pack		High voltage power cable /component		High voltage disconnect		Fuse box disabling high voltage system		Ultra capacitor, high voltage
	Gas line								

1. Identification / recognition

Silent movement or instant restart capability exists until vehicle is fully shut down.



Model name



Brand name


2. Immobilization / Stabilisation / Lifting

A. IMMOBILIZE THE VEHICLE:

1. Shift the vehicle to P gear;
2. Turn on the hazard warning lamp on the central console.



B. LIFTING POINTS:

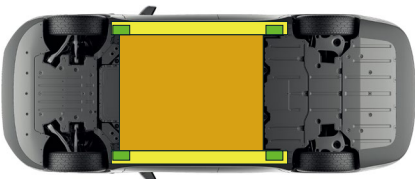


- Appropriate lifting points
- Appropriate points vehicle on side
- High voltage battery


3. Disable Electrical Hazards / Safety Regulations

Be aware that not every high voltage component is labelled. Always wear the appropriate PPE (Rubber insulated gloves / insulated rubber shoes / tools with insulating protective cover / goggles). Do not attempt to open the high voltage battery.

MAIN DISABLING METHOD

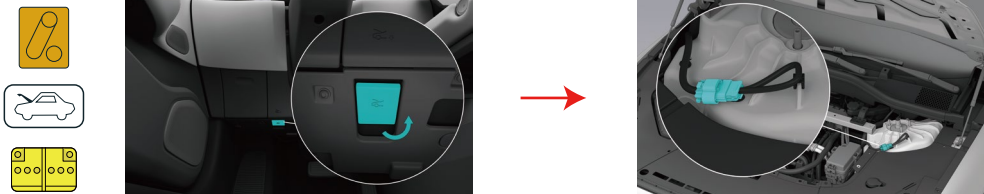

ACCESS TO 12V BATTERY

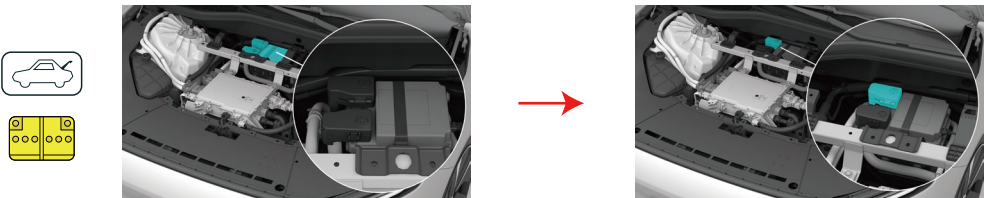





4. Access to the Occupants




Driver seat adjustment (electric)

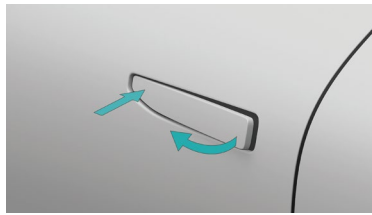

Exterior door handle

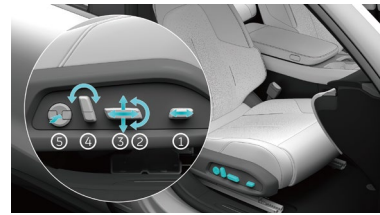

Passenger seat adjustment (electric)

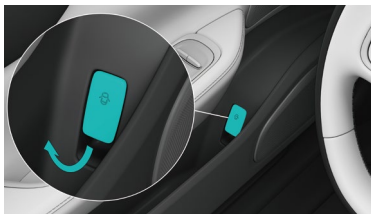

Emergency interior door handle



Steering column adjustment



Door latch

Glass types:

Laminated glass



Tempered glass

5. Stored Energy / Liquids / Gases / Solids

		12V
		350V
		1000g

6. In Case of Fire



USE LARGE AMOUNTS OF WATER



BATTERY RE-IGNITION!



DO NOT SUBMERGE VEHICLE TO EXTINGUISH BATTERY


7. In Case of Submersion

Tilt the vehicle to one side to allow water to drain out of the vehicle and the high voltage battery.

Wear appropriate PPE. Remove the vehicle from the water and continue with normal high voltage disconnection (see chapter 3). Vehicles submerged in salt water should be handled with a greater potential risk of a high voltage battery fire.

8. Towing / Transportation / Storage


STORE AT SAFE DISTANCE FROM OTHER VEHICLES!

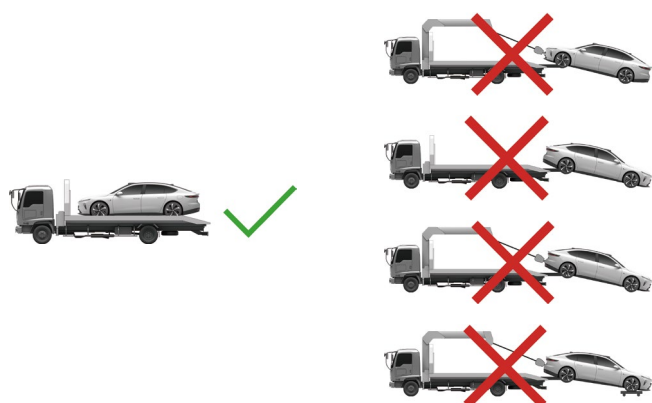

Towing/transportation method



BATTERY RE-IGNITION!



Hook storage



Hook location

9. Important Additional Information

Manufacturer information NIO

For further details, please refer to "Emergency Response Guide".

10. Explanation of Pictograms Used

	Warning high voltage		Flammable
	Caution		Hazardous to the human health
	Air-conditioning component		Acute toxicity
	Electric vehicle		Corrosives
	Bonnet		Gases under pressure
	Boot		Explosive
	Use thermal Infrared camera		Use water to extinguish the fire